

220V 380V 415V 440V Metal Press Brake Tooling Clamps Punch Holder

Basic Information

Place of Origin: ChinaBrand Name: genuo

Certification: M.2020.206.C6366

Model Number: GN15001

Minimum Order Quantity:

Price: negotiable Packaging Details: carton box Delivery Time: 60 days

Payment Terms:
L/C, T/T, D/P, D/A

Supply Ability: 1 Set/Sets Every 7~25 days



Product Specification

Product Name: Press Brake Tool Clamps Punch Holder
Application: Press Brake Bending Machine Clamps
Voltage: 220V/380V/415V/440V/customized

Color: Customer Choose

Product Material: Metal

• Forming Mode: Punching Mold

• Certification: CE

After-sales Service Provided:

Online Support Video Technical Support


Value-added Services: Presented Two Years Warranty
Highlight: 440V press brake tooling clamps,

415V press brake tooling clamps, 220V press brake clamps



More Images



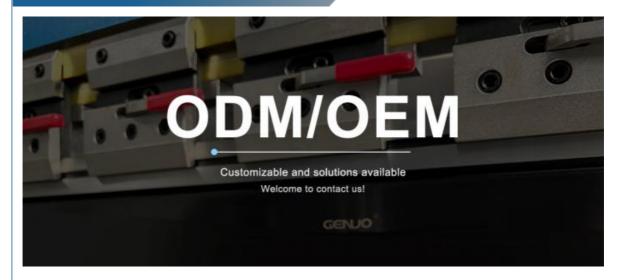

- Products Description _

We can supply various kinds of press brake tooling clamps. The mainly two types is normal type and fast type. We also can suppy hydraukc campsIn addition to the rapid clamping of the bending machine mold, it has the function of preventing the clamping or the mod and adjusting te uniorm torce or the moid.



- GN Punch-Holder (Tooling clamp) _

GENUO holds both European style tooling as well as AMADA's latest One Touch style tooling. GENUO GNSP standard fast support.

The patented rear butterfly pressing device can adapt to different types of European standard and Amada type punches.

42CrMo or C45 high frequency quenching process stamping brake tools for durability.






VERSATILE CLAMPING

The GN holds both standard European style punches and AMADA One Touch style punches allowing fast and easy tool setup. Slide in either tool and turn lever to secure punch.

GAPLESS SETUP

The internal adjustment wedge allows the faster punch holders to be located directly next to each other providing setup flexibility when using smaller sectionalized punches.

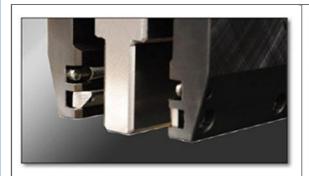

OPERATOR SAFETY

Drop prevention bar prevents punches from falling out of the punch holder during setup increasing operator safety. Once the punch is inserted into the clamp, the punch can be moved to any location along the brake bed eliminating the possibility of it falling out of the clamp.

SAFETY GROOVE

A special clamp plate is available which mounts the holder to the machine utilizing the safety groove on the top potion of the punch holder. This special clamp plate prevents holder from dropping when horizontal movement of clamp is required.



- Products Configuration _

Description	Tooling Clamp
Code#	GN15001
Tool Compatibility	Standard European/AMADA One-Touch
Machine Compatibility	Hydraulic Press Brakes
Holder Length 150mm	150mm
Effective Height 120mm	120mm
Allowable Tonnage	1000kN/m(100tons/m)



Maanshan Genuo Machinery Manufacturing Co., Ltd.



0086 555 7168598



sales@genuogroup.com



@ genuocnc.com